


APPLICATION PROCEDURE & SAFETY CONSIDERATIONS

PREFORMED LINE PRODUCTS

DUAL COAXIAL DEAD-END AND CUSTOM COAXIAL DEAD-END



Be sure to completely read and understand this procedure before applying product.

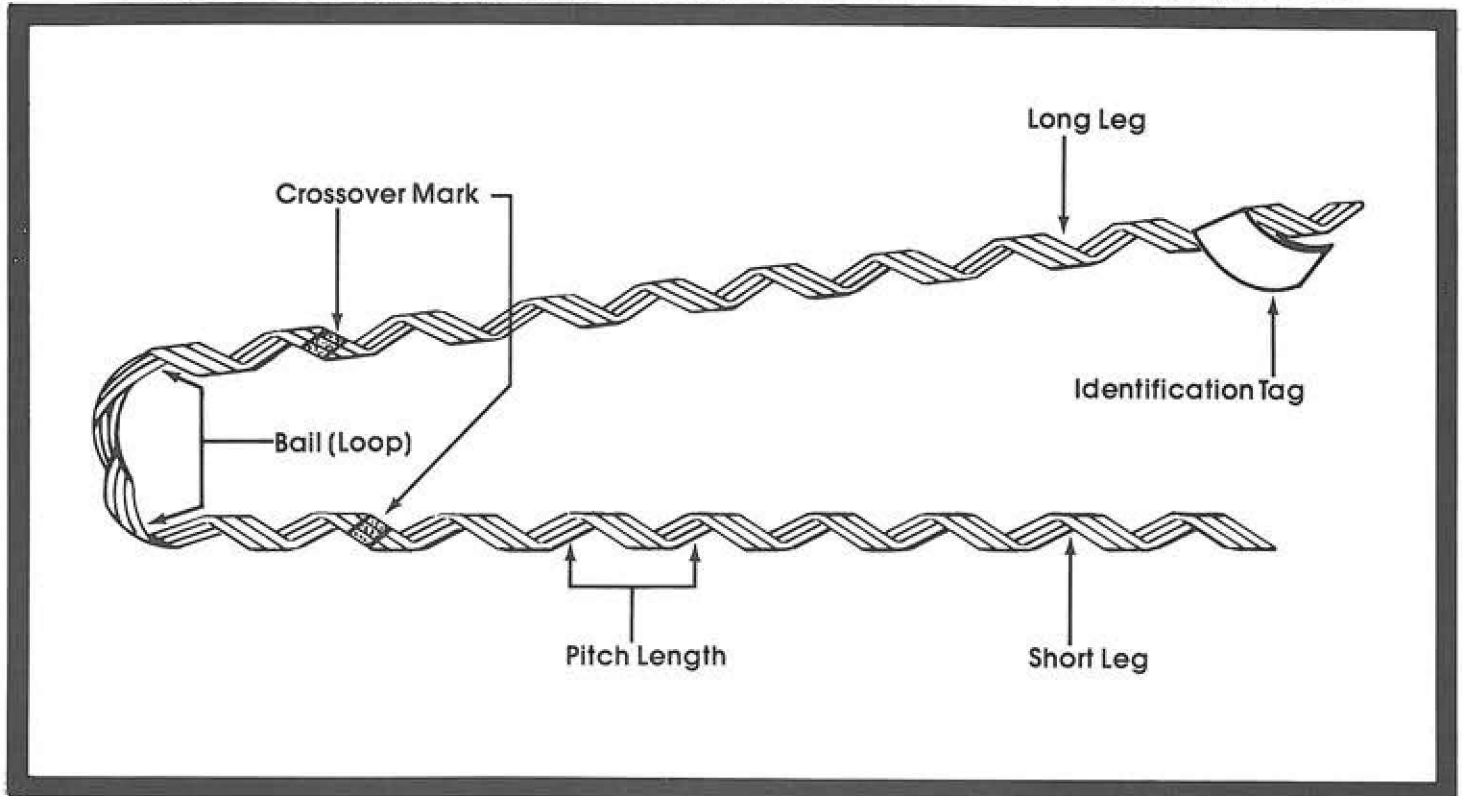


Be sure to select the proper size PREFORMED product before application.

CUSTOM COAXIAL DEAD-END (STAINLESS STEEL)		
CATALOG NO.	DESCRIPTION	CABLE DIAMETER
DE-3329	For Use on RG-59/U Coaxial Cable	.242"


COAXIAL DEAD-END (GALVANIZED STEEL)		
CATALOG NO.	DESCRIPTION	CABLE DIAMETER
DE-2518	For Use on RG-11/U Coaxial Cable	.405"

DUAL COAXIAL DEAD-END (GALVANIZED STEEL)		
CATALOG NO.	DESCRIPTION	CABLE DIAMETER
DE-2519	For Use on RG-59/U Dual Coaxial Cable	.242" x .504"
DE-2520	For Use on RG-6/U Dual Coaxial Cable	.275" x .546"


1. Position the coaxial cable to the desired location. Lay the cable in the dead-end's short leg slightly above the crossover mark. Wrap the short leg around the cable to completion (Fig. 1).

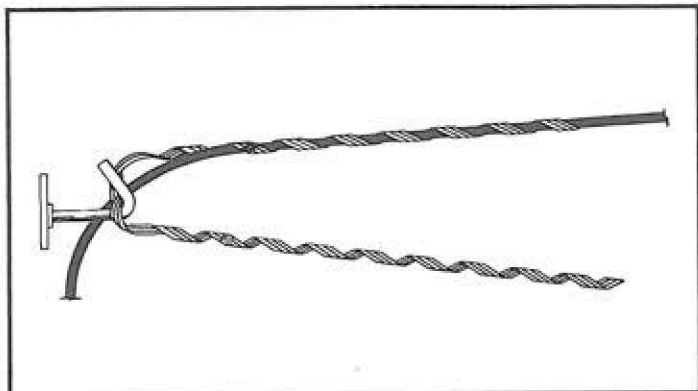

2. Insert the long leg around the hardware attachment. Match the long leg with the already completed short leg at the crossover mark. Wrap to completion (Fig. 2).

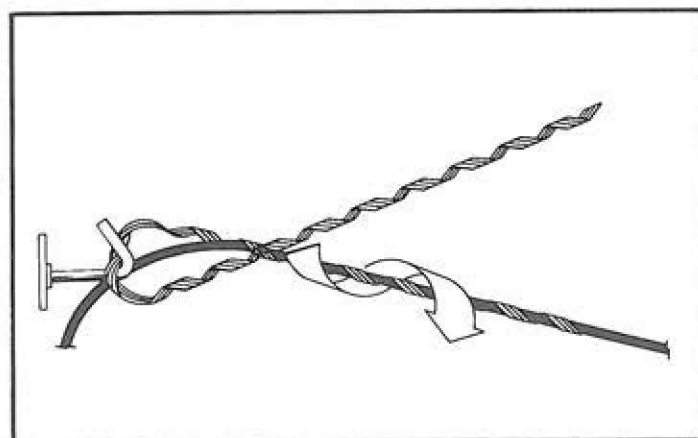

3. Completed application of the dead-end (Fig. 3).

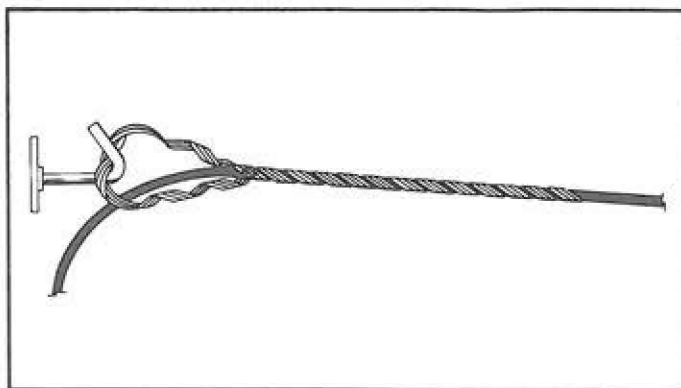

SAFETY CONSIDERATIONS

1. These products are designed to support the coaxial cable plus the appropriate CATV equipment **only** and should not be used as a lifeline.
2. This application procedure is not intended to supersede any company construction or safety standards. This procedure is offered only to illustrate safe application for the individual. Failure to follow these procedures and restrictions may result in personal injury.
3. When working in the area of energized lines, extra care should be taken to prevent accidental electrical contact.
4. For proper performance and personal safety, be sure to select the proper size Dead-End; e.g. Stainless Steel Custom Coaxial Dead-End (Cat. No. DE-3329) for RG-59/U (.242") Coaxial Cable.



PREFORMED LINE PRODUCTS