


Custom Coaxial Dead-end

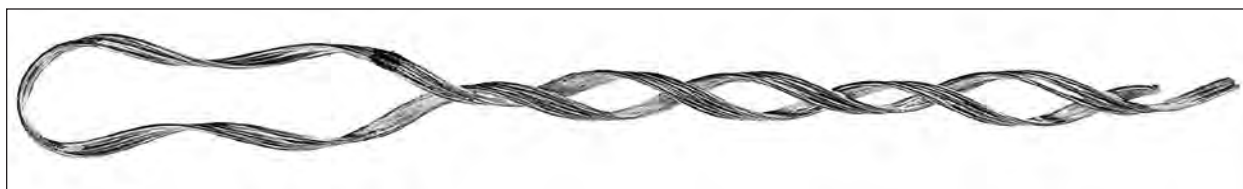

Coaxial Dead-ends

Custom Coaxial and Dual Coaxial Dead-ends are performance-proven dead-end designs for RG-59/U, Dual RG-59/U, Dual RG-6/U, and RG-11/U coaxial cable. In addition to the inherent benefits of the basic Telegrip, these premium products feature twin leg construction which cushion and relieve gripping stresses created by unusually high winds and heavy ice loading. They are especially recommended for foam insulated coaxial cable and areas where there are extreme corrosive and demanding environmental conditions.

| Catalog Number | Cable Type (mm) | Units Per Carton | Wt./Lbs. Per Carton |
|--------------------------------|--|------------------|---------------------|
| Custom Coaxial Dead-End | | | |
| DE-3329* | RG59/U .242" (6.1) | 200 | 9 |
| Dual Coaxial Dead-End | | | |
| DE-2519 | DUAL RG59/U .242" X .504" (6.1 x 12.8) | 200 | 20 |
| DE-2520 | DUAL RG6/U .275" X .546" (6.9 x 13.8) | 200 | 43 |
| Coaxial Dead-End | | | |
| DE-2518 | RG11/U .405" (10.2) | 200 | 22 |

*Manufactured from stainless steel

Pulling Eye

Pulling Eye

PREFORMED™ Pulling Eye is the fastest, most practical means of installing GUY-GRIP® Dead-ends at the anchor rod. The large eye is designed to avoid conflict with the chain hoist. The keeper bolt is adjustable for rod size. Pulling Eye is made of corrosion-resistant nodular iron, finished in orange vinyl coating for added durability against bad weather and rough handling. The keeper bolt is made of specially heat-treated extra high strength steel. The PREFORMED Pulling Eye capacity is 3,000 lbs.



| Catalog Number | Description | Standard Carton |
|-------------------------------|---------------------|-----------------|
| Anchor Rod Application | | |
| PE-0300 | Pulling Eye | 4 Units |
| Replacement Parts | | |
| PE-A-0002 | Pulling Eye: Keeper | As Required |
| PE-B-2019 | Pulling Eye: Bolt | As Required |
| PE-C-0607 | Pulling Eye: Nut | As Required |