



# Pulling Eye

The PREFORMED™ Pulling Eye is designed to facilitate safe, fast installation of GUY-GRIP® Dead-ends at the anchor rod. Constructed of corrosion-resistant nodular iron, this reusable tool has a large eye which is offset to position the hook of the chain hoist safely to one side, and

permit easy, uncrowded application of the Dead-end. The PREFORMED Pulling Eye is adjustable for rod size, and is engineered to withstand a 3,000 lb. working load. An orange vinyl coating provides weather and handling protection and ready identification.




1. Component Parts: The keeper is to be used with 1/2", 5/8", and 3/4" anchor rods (see arrows). For 1" and 1-1/4" anchor rods, the PREFORMED Pulling Eye is used without the keeper.

**CAUTION:** The Pulling Eye *must be secured* with the nut and bolt on every installation.

(Note: The bolt is made of specially heat-treated extra-high-strength steel, and is identified by the industry mark on its head. Any replacement should be of the same quality.)



2. PREFORMED Pulling Eye is position on 3/4" anchor rod. Note that the keeper (see arrow) is used.

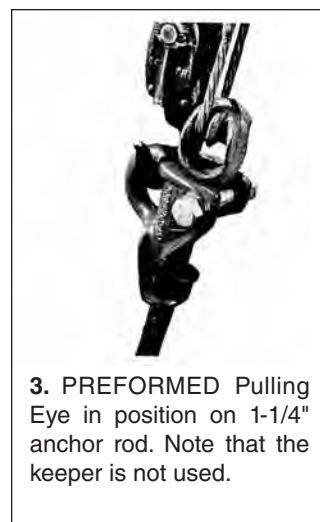

3. PREFORMED Pulling Eye in position on 1-1/4" anchor rod. Note that the keeper is not used.

## SAFETY CONSIDERATIONS

1. This product is intended for a specified application. CAUTION: DO NOT USE THIS PRODUCT BEYOND ITS WORKING LOAD LIMITS. DO NOT MODIFY THIS PRODUCT IN ANY WAY OTHER THAN SHOWN.
2. This product is intended for use by trained craftspeople only. This product SHOULD NOT BE USED by anyone who is not familiar with and trained in the use of it.
3. When working in the area of energized lines with this product, EXTRA CARE should be taken to prevent accidental electrical contact.
4. For PROPER PERFORMANCE AND PERSONAL SAFETY be sure to select the proper size PREFORMED Pulling Eye before application.
5. PREFORMED Pulling Eyes are precision devices. To insure proper performance, they should be stored in cartons under cover and handled carefully.

Catalog Number	Description	Std. Ctn.
PE-0300	Pulling Eye	4 Units

## Replacement Parts

Catalog Number	Description	Std. Ctn.
PE-A-0002	Pulling Eye: Keeper	As Required
PE-B-2019	Pulling Eye: Bolt	As Required
PE-C-0607	Pulling Eye: Nut	As Required

Note: 3,000 lb. working load is based on a 5 to 1 safety factor.