


## **Reducing Splice**

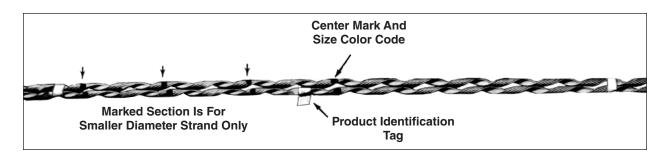

## **Reducing Splice**

PREFORMED<sup>™</sup> Reducing Splices are intended to permanently join two strands of different diameters. Application by hand—no tools required—is fast, easy, uniform and can be visually checked to assure proper application. Without any loose parts, jaws to seat, or teeth to bite into the strand, the Reducing Splice is designed to permit spinner-free travel without adjusting the gates or lifting the spinner over the splice.

The PREFORMED Reducing Splice is made of material completely compatible with the strand to which it is applied and can be used in any environment.

Galvanized Steel, C-Coat for use on Extra High Strength or Utility Grade Strands							
Catalog Number	Standard Size			Reduced End Color	Per Carton		Non-Reduced End Color
	From	То	Length	Code	Units	Wt./Lbs.	Code
LSR-2122	<sup>5</sup> / <sub>16</sub> "	1⁄4 "	35"	Yellow	50	33	Black
LSR-2123	3/8"	<sup>5</sup> ⁄ <sub>16</sub> "	42"	Black	25	25	Orange
LSR-2124	<sup>7</sup> / <sub>16</sub> "	3/8"	50"	Orange	25	39	Green
LSR-2125	3/8"	1⁄4"	42"	Yellow	50	41	Orange

NOTE: Left Hand Lay Standard