




## PULLING EYE

The **Pulling Eye** is designed to facilitate safe, fast installation of Big-Grip Dead-Ends at the anchor rod. Constructed of corrosion-resistant nodular iron, this reusable tool has a large eye which is offset to position the hook of the chain hoist safely to one side, and permit easy, uncrowded application of the dead-end.

### FEATURES AND BENEFITS

- Installs around the anchor hardware in seconds
- Adjustable for rod size
- Engineered to withstand a 3,000 lb working load
- Orange vinyl coating provides weather and handling protection and ready identification
- Facilitates safe, fast installation of all dead-ends by a pulling point at the anchor.

## COMPONENTS

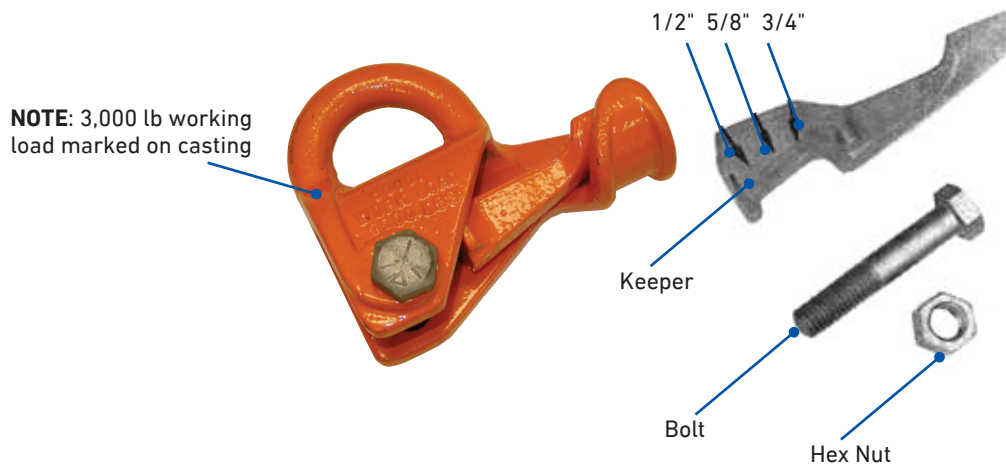

| Component | Description   |
|-----------|---|
| Keeper    | Cast of high-strength aluminum alloy. To be used with 1/2", 5/8", and 3/4" anchor rods (see arrows). For 1" and 1-1/4" anchor rods, the Pulling Eye is used without the keeper. |
| Bolt      | Made of specially treated extra-high-strength steel, and is identified by the industry mark on its head.  |
| Hex Nut   | Galvanized steel  |

**CAUTION:** The Pulling Eye must be secured with the nut and bolt on every installation.

**NOTES:**

- (1) The bolt is made of heat-treated extra-high-strength steel, and is identified by the industry mark on its head. Any replacement should be of the same quality.
- (2) 3,000 lb working load is based on a 5 to 1 safety factor.

## ORDERING INFORMATION

### Pulling Eye

| Catalog Number | Description | Standard Carton |
|----------------|-------------|-----------------|
| PE-0300        | Pulling Eye | 4 Units         |

### Replacement Parts

| Catalog Number | Description        | Standard Carton |
|----------------|--------------------|-----------------|
| PE-A-0002      | Pulling Eye Keeper | as required     |
| PE-B-2019      | Pulling Eye Bolt   | as required     |
| PE-C-0607      | Pulling Eye Nut    | as required     |