




PREFORMED LINE PRODUCTS
The connection you can count on.

COYOTE® STP-JR (Service Termination Point)

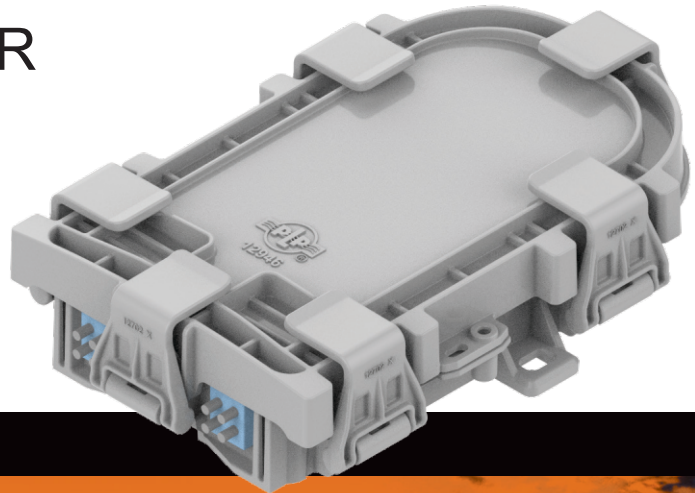

COMMUNICATIONS



ENERGY



SPECIAL INDUSTRIES



SOLAR

COYOTE®
FIBER OPTICS



MANUFACTURED IN SOUTH AFRICA

COYOTE® STP-JR (Service Termination Point)


Description

Network operators value the security of each splice and desire rugged closures along the entire fiber route to ensure that they can maintain the high level of service today’s customers demand. Traditionally, fiber optic products offered to address the last connection point at the customer premises have been less durable and contain marginal sealing systems. Since every splice in your network is critical, why risk compromising your service levels at the final connection? With the COYOTE® STP-JR, you no longer have to.

The COYOTE® STP-JR is a small scale, cost effective closure which provides an alternative to traditional network interface devices, while offering much greater application flexibility. The robust latch system, paired with an integrated overmolded cover, allows for quick re-entry and creates a secure seal over a wide range of cable profiles.

Features


Size	8" x 4.8" x 1.9" (200 x 125 x 49 mm)	Max Splice Capacity	12 Single Fusion, 4 Mechanical
Application	Indoor/Outdoor Premises, Pedestal, Wall/Pole Network Interface Device (NID)	Max Adapter Quantity	2 Simplex SC, 2 Duplex LC
Degree of Protection	IP-68	Grommet Quantity	2 (Multi-Hole Grommets Available)
Material Construction	Rugged UV Stabilized, Flame Retardant Material (UL94-5VA Rated)		

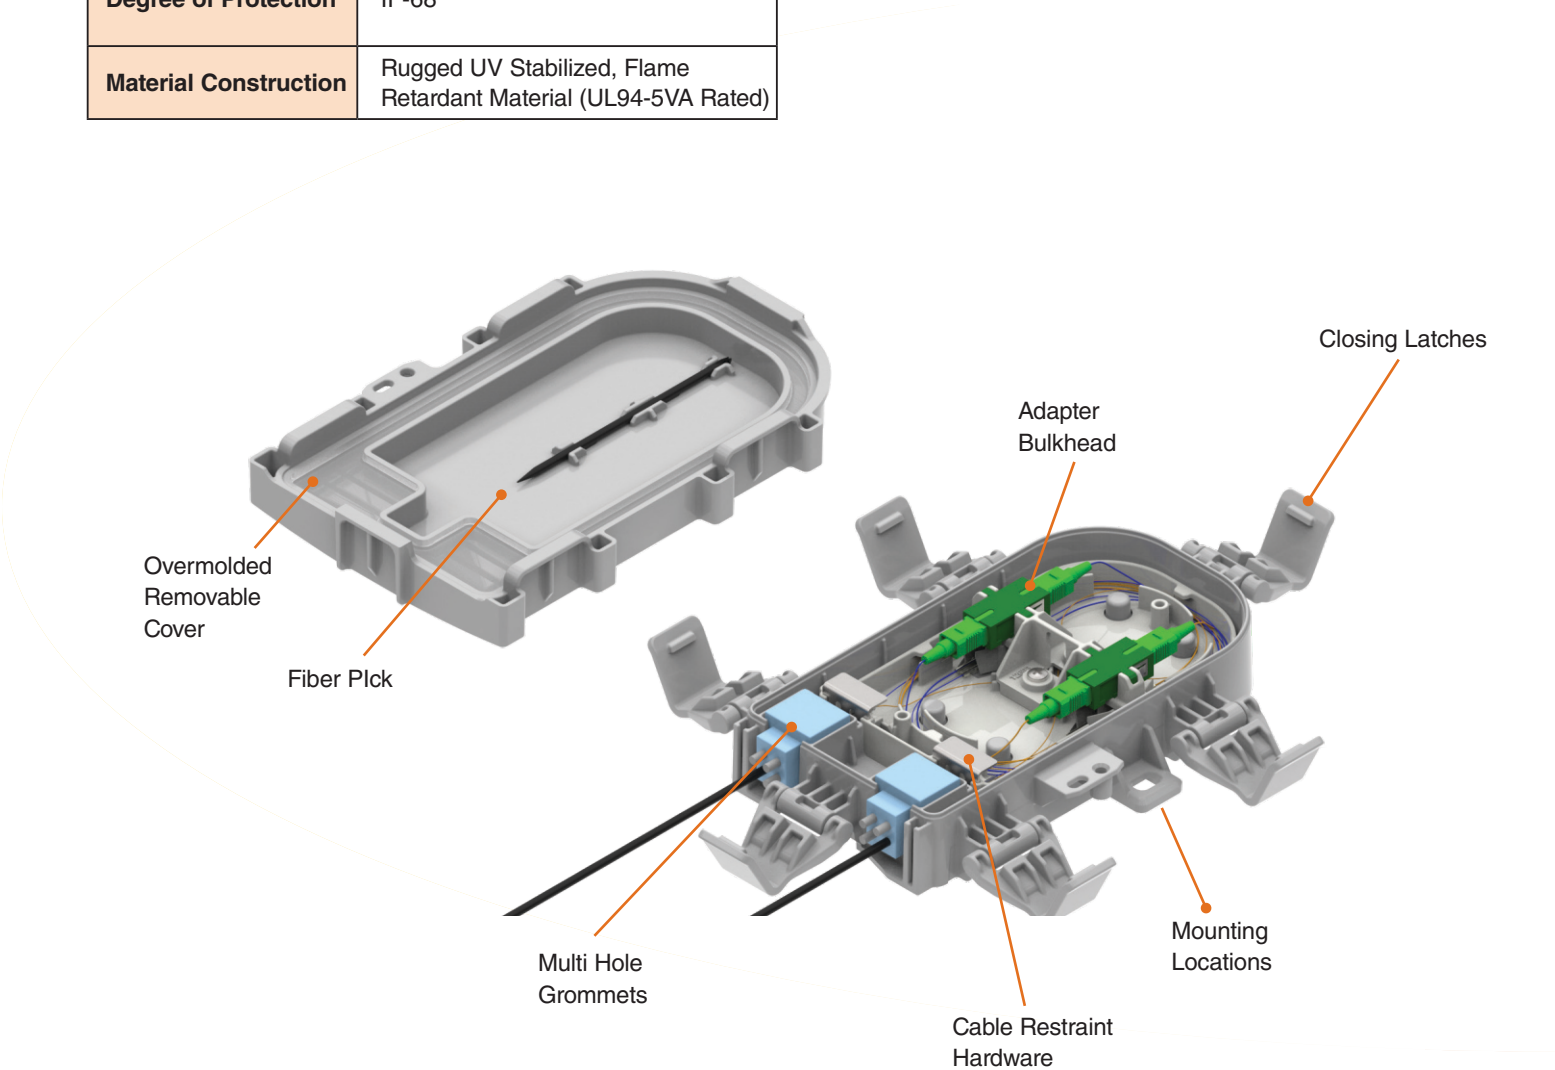

COYOTE STP-JR Splice and Cross-Connect

PLP® Fiber Optic Products

NETWORK CONFIGURATION

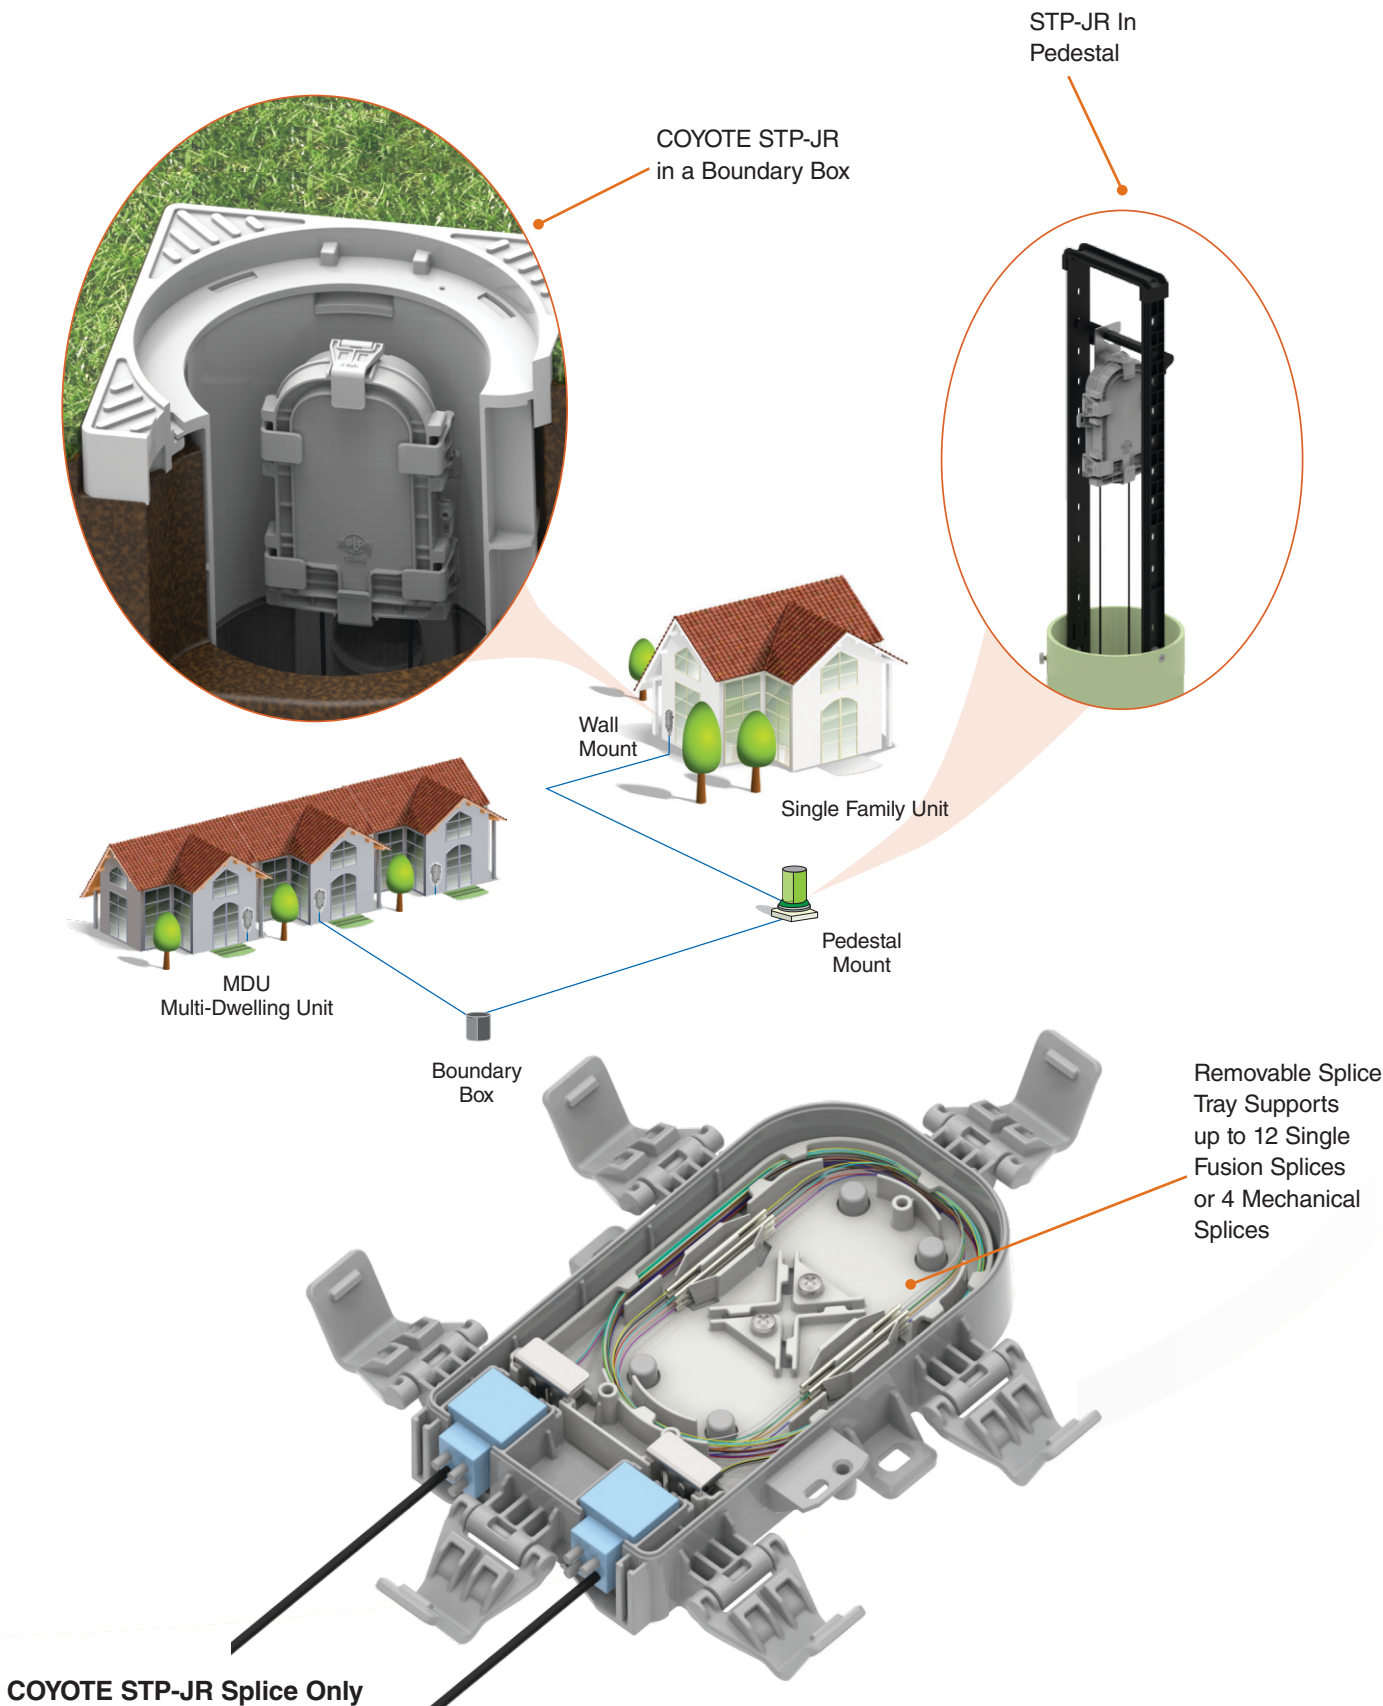

COYOTE® STP-JR Ordering Instructions





Catalog Number Example: STP-JR-MM-2-1-N

STPJR — XX — X — XX — X

Grommet Selection Select 4	Cable Diameter Range In
A	SOLID / PLUG
B	.170 - .220 (4.3 - 5.6 MM) ROUND CABLES
C	.220 - .270 (5.6 - 6.9 MM) ROUND CABLES
D	.270 - .320 (6.9 - 8.1 MM) ROUND CABLES
J	.156 - .170 (4.0 - 4.3 MM) ROUND DROP CABLES
K	.093 - .125 (2.4 - 3.2 MM) ROUND DROP CABLES
M	3.8 MM ROUND DROP CABLES

Grommet under test to confirm IP performance.
Contact your local PLP representative for more
details before placing an order.

Organizer Options Select 1
1
Splice Only
2
Splice and Cross-Connect

Adapter Type Select 1		
N	NONE	0
1		1 or 2
	SC/APC	
2		1 or 2
	SC/UPC	
3		1 or 2
	LC/APC	
4		1 or 2
	LC/UPC	

Accessories	
A	STP MOUNTING BRACKET
B	FIBER PICK
C	FELT AND CABLE TIES
D	MEASURE TAPE
E	SPLICE PROTECTORS 12
F	PEDESTAL BRACKET
N	NONE



PREFORMED
LINE PRODUCTS

Preformed Line Products
180 Ohrtmann Road
Willowton, Pietermaritzburg

Mailing Address:

P.O. Box 4015
Willowton Pietermaritzburg, 3200

Telephone: +27 (0) 33 397 5800

Fax: +27 (0) 333877094

Web Site: www.preformedsa.co.za

E-mail: sales@preformedsa.co.za

© 2017 Preformed Line Products

Printed in SOUTH AFRICA

CO-CA-08-15-1

09-17-300